










OLD-OX12




Photometric data:



ORION INTERNATIONAL Performance parameter		
LED Light Source:	Cree, Lumileds, Osram, Epistar	Effects:single color, full color, gradient, chasing, flowing
Color Temperature:	Single color, RGB, RGBW, RGBA, RGB+W	Protection Grade: IP65
LED CRI:	≥ 80 R9>0	Electrical Safety Grade: Class I / III
Lifespan:	≥ 50000h	Voltage: AC220V 50/60Hz DC24V
Beam Angle:	3~110° 10x30° 10x60° 25x45° (Optional)	Current: constant current drive
Rotation Angle:	210°	Working Temperature: -35℃ ~ +45℃
Control Mode:	ON/OFF、DMX512	Mounting Bracket: customizable

ORION INTERNATIONAL Optional accessories



Glare-shield




Ground Stake

ORION INTERNATIONAL Features

- It's suitable for building facades, bridges, parks, squares, etc.
- Exquisite anti-UV surface coating for outdoor environment
- High thermal conductivity Aluminum-6063-T5 lamp body ensures heat dissipation and extends product's life
- Whole structure waterproofing design technology

ORION INTERNATIONAL Product Size

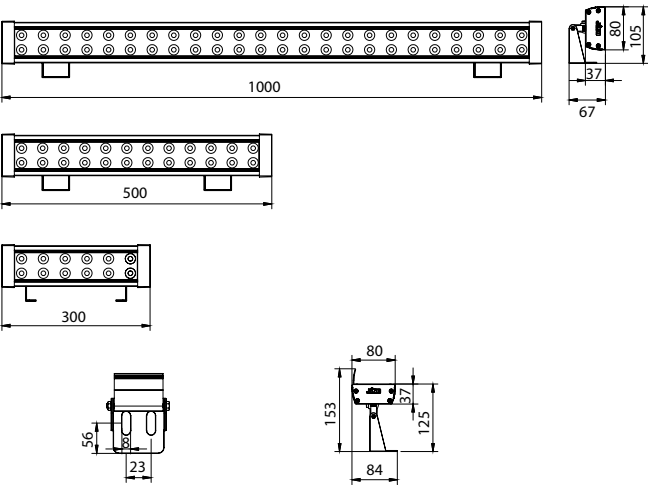

ORION INTERNATIONAL Product number

Model	Power	Input Voltage	LED Quantity	Single LED Power	Color
OLD-OX12-D	48~72W	AC220V/DC24V	48/60/72	1~3W	single color
OLD-OX12-R	48~96W	AC220V/DC24V	48/60/72	1~4W	full color